

LED Escape sign luminaire; Luminaire with local battery supply for 1h emergency lighting for maintained or non-maintained mode, with automatic or central testing of emergency lighting function; wall mounted; housing made of Polycarbonate (PC) in injection moulded white finish; 2-channel LED control gear with mechanical and optical addressing and integral maintenance function. Luminaire easy to install. Zero maintenance thanks to LED technology; service life of 50,000 h at constant luminous flux. Screw terminals 2.5 mm², loop-in/loop-out wiring possible for 1.5 mm². Power supply: 220/240 V AC. Total power: 4.5 W; degree of protection: IP42, class of protection: SC2, Luminaire wired with halogen-free leads, non-maintained and maintained mode possible, Maintained mode: +5°C to +30°C, Non-maintained mode: +5°C to +30°C; dimensions of luminaire including escape sign: 227 x 130 x 27 mm; weight: 0.35 kg; Luminaire wired with halogen-free leads; please order escape sign separately


Příslušenství: PURESIGN 150 AW/EW RZ-1L ERI

22168701

Escape sign for PURESIGN 150 AW/EW ERI with aluminium surround in powder-coated silver-look finish, designed for fitting without tools onto the PURESIGN 150 ERI housing. Escape-route illumination (ERI) function provided by two additional high power LEDs and asymmetric lenses with 360° adjustment, latched in 90° positions. Integral low power LEDs provide uniform backlighting of pictogram with a luminance of > 500 cd/m² in the white region; pictogram applied by digital printing to the transparent polycarbonate panel. Arrow: left arrow. Recognition distance: EN-30 m; dimensions: 310 x 10 x 160 mm, weight: 0.72 kg.




ZS_ONL_F_PUR_150_AW_EW_RZ-L_ERI.jpg

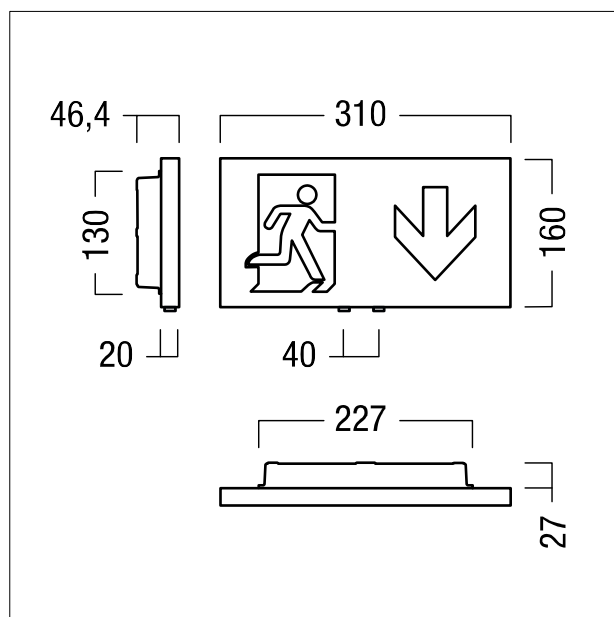

ZS_ONL_M_PURE_150_AW_Nx_ERI_incl_Rx.wmf

Křivka svítivosti

STD – standard

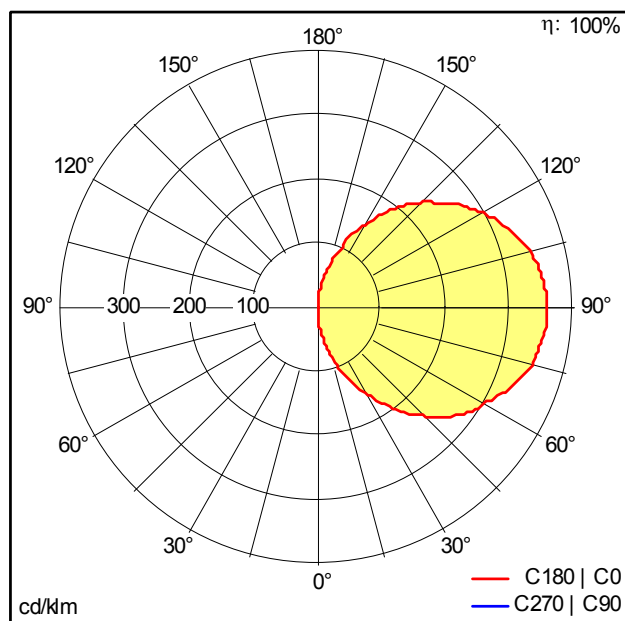

D31337AA_NE1_NT1.Idt ,

- Světelný zdroj: LED
- Světelný tok*: 45 lm
- Světelný výkon svítidel*: 10 lm/W
- Předřadník: 1 x 89800484 EMPower2 LED NTx 2xL2 140
- Teplota chromatičnosti*: 5733 Kelvin
- Barevná tolerance v místě (MacAdam)*: 4
- Střední životnost*: 50000h L80 při/u 25°C
- Příkon svítidla*: 4.5 W Lambda = 0.5
- Příkon v pohotovostním režimu*: 1.1 W
- Napájení: 1.1 W
- Vyměření doby provozu: 1 h

Hodnoty označené * představují stanovené rozměrové hodnoty. Výkon a světelný tok podléhají zpočátku toleranci až do +/- 10 %. Tolerance barevné teploty: % K Pokud není uvedeno jinak, platí hodnoty pro okolní teplotu 25°C.

